




**IJCAET
ISAMPE
2017**

**2nd International Joint Conference on Advanced Engineering and Technology
& International Symposium on Advanced Mechanical and Power Engineering**

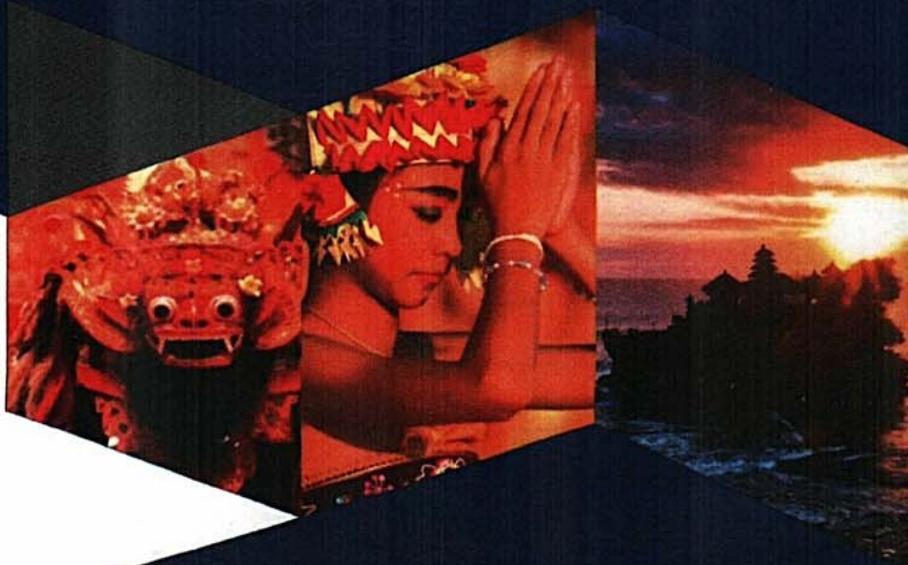

PROGRAM BOOK

**Advanced Engineering and
Innovation for Green Technology and
Sustainable Development**

**SANUR PARADISE PLAZA HOTEL
BALI, INDONESIA
AUGUST 24 - 26, 2017**

**Organized by:
Diponegoro University, Pukyong National University and Udayana University**



**UNIVERSITAS
UDAYANA**

Supporting Organizations:



**UNIVERSITY OF
FUJIAN**



The Performance of Pump as Turbine with Machined Impellers

D.L Zariatin^{1,}, Shanti Kumbarasari², and Dwi Rahmalina¹*

¹Mechanical Engineering, Pancasila University, Jakarta, Indonesia

²Mechanical Engineering, ATMI Cikarang, Jakarta, Indonesia

Abstract. Pump as turbine (PAT) is a type of micro hydro power plant that used a commercial pump as a turbine in order to generate electricity. Most of PAT facilities used centrifugal pump. The main component of the pump is the impeller, which commonly produce by using a casting process. However, this paper describes a manufacturing process to produce PAT impeller by using machining process. Two variations of materials (brass and AA-7075) with a number of blades of 5 and 6 were produced and tested. The performance of each impeller was compared to its original impeller. The experiment results show that the impeller with 6 blades made of brass material improves 48.9% of power generated.

Keyword: 3-axis milling, pump as turbine, impeller, surface roughness.

1. Introduction

Pump as turbine (PAT) is a type of hydro power plant that used a commercial pump as a turbine in order to generate electricity. PAT has several advantages such as low-cost, simple design and easy to assemble, widely application and viability, longer lifetime, etc. [1]. Therefore, it is suitable for rural and remote area [2, 3]. Numerous research papers about PAT technology have published [4-7]. Generally, commercial pump impellers are made by casting process with surface roughness around 50 μm - 0.4 μm [8]. However, machining process could be an alternative of manufacturing process to produce an impeller. The main reason of using machining processes to manufacture an impeller is because the surface could be determined.

Young and Chuang [9] developed an integrated 5-axis machining module for a centrifugal impeller. Cutter Location (CL) point was generated based on the geometric model of the blade and hub by using CAD/CAM software. Lazoglu et al [10] also used CAD/CAM software to generate the tool path by a developed boundary representation that consider an approach for prediction of cutting forces. Yau et al [11] explain the mathematical calculation performed in CAD/CAM software simulation of three and five axis milling machine in order to produce complex shape such as an impeller. Furthermore, Tuysuz [12] explain the simulation of the milling process for ball and end-mill cutting tools that includes the cutting forces. Although three-axis milling machine is rarely used to manufacture an impeller, however Fan and Xi [4] proposed an algorithm to optimize the tool-path

* Corresponding author: dedeliazariatin@univpancasila.ac.id

generation for three-axis machining of a sculptured impeller blade surface. The algorithm calculated the four tool sub-paths on the sub-surface.

It is known that surface roughness is an important parameter in fluid flow. The surface roughness were shown to have a very little effect in the laminar region. However, in the turbulent region, roughness played a major role [13]. The laminar and turbulent region are identified by the Reynolds number (Re). However, the Reynolds number is increased on rougher surfaces [14]. Kaewnai [15] stated that losses in the impeller increase with increasing the surface roughness. Five impeller surface roughness variation which is 0 mm, 0.0001 mm, 0.001 mm, 0.01 mm and 0.1 mm were investigated by using CFD. It is found that the surface roughness have a high effect on loss.

In this research, the machining process was performed to produce impellers for the pump as turbine facilities. The effect of impeller material (brass and AA-7075), numbers of the impeller blade (5 and 6-blades) and impeller surface roughness were studied. The impellers tested and analysed its performance to generate power.

2. Manufacture of Impeller

Fig. 1 shows the manufacturing steps to produce the impeller. The impeller dimension was based on the original impeller that measured by using the Coordinate Measuring Machine (CMM). Due to the surface roughness value of the original impeller was exceeded the lower limit of the digital Perthometer range of measurement, therefore the surface roughness of the original impeller was measured by comparing it to standard roughness tester. The original impeller is made of brass and has six blades. In this research two types of material and two variation number of blades were produced. The material is brass and AA-7075. The number of blades are 5 and 6 blades.

After identifying the geometric properties of the original impeller, a CAD software was used to make the impeller model. Because the machining process was performed in 3-axis milling machine, the impeller model was divided into two part section. The machining strategy was generated by using a CAM software. The tool path simulation and NC/G code or CL File were generated in this step. The CL file, then transferred to YCM MV66A 3-axis milling machine.

The dimension of machined impellers was inspected by CMM and the surface roughness was measured by digital Perthometer. Two section part of the impeller was joint by using pin injector joint and then welding. The next step after the impellers were produced was to install the impeller in the pump that used as a turbine. Then, install the pump to the PAT test facility.

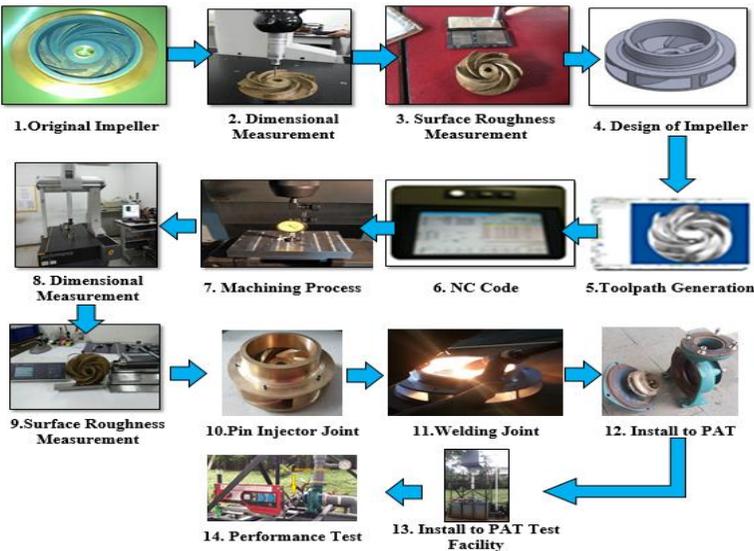


Fig.1. Manufacturing process of machined centrifugal impeller

The machining sequence (simplified) and the cutting parameters for both 5 and 6 blades are shown in Table 1 and Table 2. In order to keep watch on the cutting tools condition, before, during and after the machining process, the cutting tools were monitored by using Dino Lite AM4815 digital microscope camera. Because improper cutting tool condition such as tool wear, tool crack, etc. would degrade the impeller quality.

Table 1. Machining sequence and cutting parameter for 5 blades impeller










Operation	Roughing			Finishing		
						
	Rough 1	Rest 1	Rest 2	1	2	3
Allowance (mm)	0.3	0.3	0.35	0	0	0
Tolerance (mm)	0.05	0.05	0.05	0.005	0.005	0.005
Depth of Cut (mm)	0.5	0.5	0.3	0.1	0	1
Spindle Speed (Rpm)	2500	4500	4500	4500	4500	4500
Cutting Feed Rate (Rpm)	2000	1500	1500	1500	1500	1500
Step Over	16	6	2	0	0	0
Cutting Tool	ZCC 20	End-mill 10	Ball nose 6	Ball nose 6	Ball nose 6	End-mill 10
Machining time (min)	Dural	23	43	179	77	34
	Brass	92	24	31	179	78

Table 2. Machining sequence and cutting parameter for 6 blades impeller

Operation	Roughing			Finishing						
										
	Rest	1	2	1	2	3	4	5	6	
Allowance (mm)	0.35	0.4	0.4	0	0	0	0.02	0.02	0	
Tolerance (mm)	0.05	0.05	0.03	0.05	0.005	0.005	0.005	0.005	0.005	
Depth of Cut (mm)	0.5	0.3	0.2	0	0.1	0	0	0	0	
Spindle Speed (Rpm)	1500	1500	1500	1500	1500	1500	1500	1500	1500	
Cutting Feed Rate (Rpm)	1000	1000	1000	1000	1500	1000	1000	1000	1000	
Step Over	16	2	13	0.08	0.1	0.1	0	0	0	
Cutting Tool	ZCC 20	Ball 6	Ball 4	Ball 4	Ball 6	Ball 6	Ball 4	Ball 2	Flat 10	
Machining time (min)	Dural	98	14	7	21	66	67	10	20	6
	Brass	79	14	6	21	74	128	11	28	6

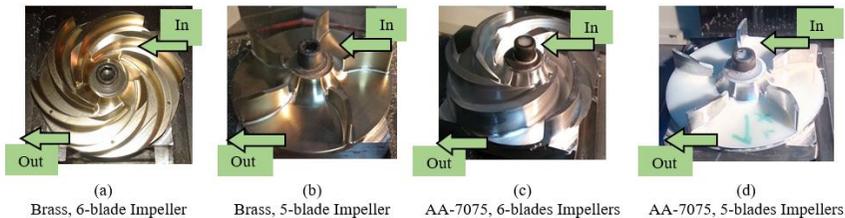


Fig.2. Cross-section view of the impellers

Fig.2 shows the cross-section view of the impellers. This section part was assembled to the other section by using pin injector and welding. The result of the manufacturing process is shown in Table 3 pictures. Meanwhile the value of surface roughness (Ra) for each impeller is also listed in Table 3.

Table 3. Impeller surface roughness

Picture	Impeller	Outer Ra (μm)	Inner Ra (μm)	Average Ra (μm)
	Brass, 6-blades	0.24	0.33	0.28
	Brass, 5-blades	0.38	0.34	0.36
	AA-7075, 6-blades	0.46	0.38	0.42
	AA-7075, 5-blades	0.31	0.46	0.31

3. Experimental Setup

The Experimental test was performed by using a Laboratory Scale PAT test facility as shown in Fig.3. In this facility, the top reservoir tank made of PVC, stores the water supply. It is placed 3.7 meters height above the ground. Clean water (assumed as H₂O Constant) flows from the tank into the PAT through PVC pipe. The water flows into the pump and rotates the impeller and its shaft. The shaft rotates the generator and produces electricity. The rotational speed of generator shaft was measured by using a digital tachometer. Meanwhile, the voltage and current produced by the generator was measured by using a digital multi tester.

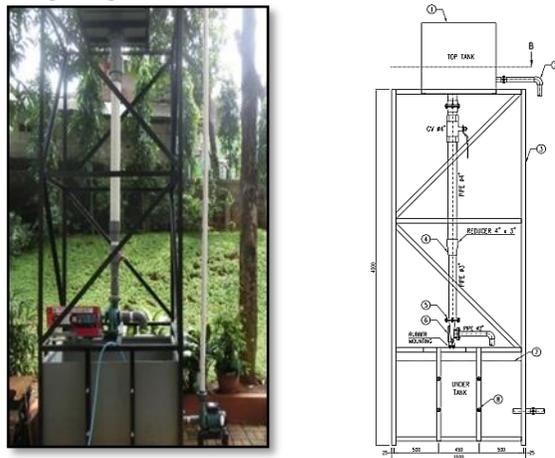


Fig.3. PAT Laboratory Scale Test Facility

4. Result and Discussion

Table 4 shows the experimental results of the shaft generator rotational speed and the power generated for each impeller. The table also listed the rotational speed and power improvement. Fig. 4 and Fig. 5 shows the chart of the shaft generator rotational speed and the electric power generated by the generator. It indicated that impeller made of brass with 6 number of blades generates the highest rotational speed and electric power. This impeller has the lower surface roughness among

others. It could be concluded that the better quality of surface roughness of PAT impeller would produce more electric power.

Table 4. Experiment Result

No	Type of Impeller	Avg. Surface Roughness (µm)	Shaft Generator Rotational Speed (RPM)	Rotational Speed Improvement (%)	Power (Watt)	Power Improvement (%)
1	Original	12.5	1487	-	10.9	-
2	Brass, 6-blades	0.28	3077	106.9	27.14	148.99
3	Brass, 5-blades	0.36	782.7	-47.36	10.6	-2.75
4	AA-7075, 6- blades	0.42	2190	47.27	13.46	23.48
5	AA-7075, 5 -blades	0.31	640	-56.96	17.28	58.53

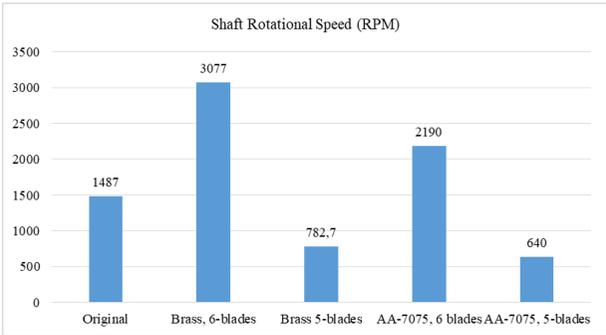


Fig. 4. The rotational speed of shaft generator

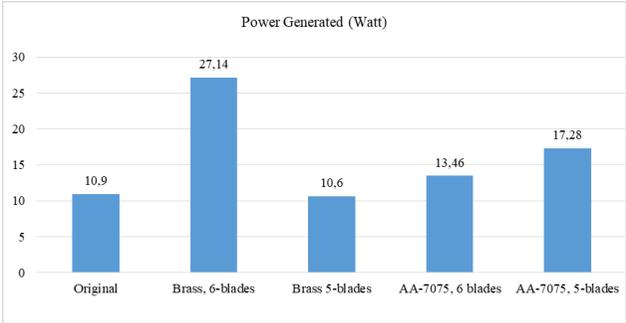


Fig. 5. The power generated

5. Conclusion

In this research, centrifugal impellers manufactured by machining process were used as impellers in a laboratory scale PAT micro-hydro power plant. Four impellers made of brass and AA-7075 with 5 and 6 number of blades were manufactured and tested for its performance. The performance is compared to the original impeller performance. Based on the experimental results, it is found that, impeller with 6-blades generates more power than 5-blades impeller. However, the type of material did not have any influence to the power generated. Meanwhile, the smoother impeller surface will increase the impeller rotational speed, up to two times faster than the original impeller.

References

- [1] A. Elbratran, O. Yaakob, Y. M. Ahmed and H. Shabara, "Operation, performance and economic analysis of low head micro-hydropower turbines for rural and remote areas : A review," *Renewable and Sustainable Energy Reviews*, vol. 43, no. 1, pp. 40-50, 2015.
- [2] A. Mariano, "Pump as turbine - A pico-hydro alternative in Lao People's Democratic Republic," *Renewable Energy*, vol. 35, 2010.
- [3] A. M. a. S. A. Rusdi, "Research Efficiency Pump as Turbine (PAT) to Support the Planning and Implementation in PLTMH in the District Sumbawa," *Asean Journal of System Engineering*, vol. 2, no. 1, 2014.
- [4] H.-Z. Fan and G. Xi, "Optimizing tool-path generation for three-axis machining of a sculptured impeller blade surface," *Proceeding of the Institution of Mechanical Engineers, Part B : Journal of Engineering Manufacture*, vol. 226, no. 1, pp. 43-51, 2012.
- [5] M. Suarda, N. Suarnadwipa and W. B. Adnyana, "Experimental Work on Modification of Impeller Tips of a Centrifugal Pump as Turbine," in *The 2nd Joint International Conference on "Sustainable Energy and Environment (SEE 2006)"*, Bangkok, Thailand, 2006.
- [6] A. S. K. H. M. a. R. N. P. S. V. Jain, "Effect of impeller diameter and rotational speed on performance of pump running in turbine mode," *Energy Conversion and Management*, vol. 89, no. 1, pp. 808-824, 2015.
- [7] H. P. W. J. S. a. P. G. A. D. Giosio, "Design and performance evaluation of a pump-as-turbine micryo-hydro test facility with incorporated inlet flow control," *Renwable Energy*, vol. 78, pp. 1-6, 2015.
- [8] S. Kalpakjian and S. R. Schmid, *Manufacturing Engineering and Technology*, Singapore: Pearson, 2009.
- [9] H.-T. Young and L.-C. Chuang, "An integrated machining approach for a centrifugal impeller," *The International Journal of Advanced Manufacturing Technology*, vol. 21, pp. 556-563, 2003.
- [10] I. Lazoglu, Y. Boz and H. Erdim, "Five-axis milling mechanics for complex free form surface," *CIRP Annals - Manufacturing Technology*, vol. 60, pp. 117-120, 2011.
- [11] H. T. Yau, L. S. Tsou and Y. C. Tong, "Adaptive NC simulation for multi-axis solid Machining," *Computer-Aided Design & Application* , vol. 2, pp. 95-104, 2005.
- [12] O. Tuysuz, "Prediction of cutting forces in three and five-acis ball-end milling tool indentation effect," Thesis - Mechanical Engineering, The University of British Columbia, Vancouver, 2009.
- [13] J. Taylor, A. L. Carrano and S. G. Kandlikar, "Characterization of the effect of surface roughness and texture on fluid flow - past, present, and futer," *International Journal of Thermal Sciences*, vol. 45, pp. 962-968, 2006.
- [14] J. Qian, Z. Chen, H. Zhan and H. Guan, "Experimental study of the effect of roughness and Reynolds number on fluid flow in rough-wal single fractures : a check of local cubical law," *Hydrological Process*, vol. 25, pp. 614-622, 2011.
- [15] S. Kaewnai, M. Chamaoot and S. Wongwises, "Predicting performanceof radial flow type impeller of centrifugal pump using CFD," *Journal of Mechanical Science and Technology*, vol. 23, pp. 1620 - 1627, 2009.
- [16] L. Moody, "Friction factors for pipe flow," *ASME Tran* , vol. 66, pp. 671-683, 1944.