

Series: [Advances in Engineering Research](#)

Proceedings of the 2nd International Conference on Green Materials and Environmental Engineering

With the support from scientists in materials and environment fields, it is a great honor to announce that the 2nd 2015 International Conference on Green Materials and Environmental Engineering (GMEE 2015) will be held in the beautiful island- Phuket Island, Thailand on December 20 and 21, 2015

The first GMEE proved to be a great success; it was held on September 21 and 22, 2014 in one of the world's leading international financial centres- Hong Kong, China. GMEE 2014 had received contributions and was attended by people from many countries and regions. The published papers were of great inspiration to the later researches in related fields, and the presentations at the conference were also excellent. All accepted papers at GMEE 2014 have been successfully indexed by EI Compendex after the publication.

The 2nd GMEE 2015 shares the same purpose with GMEE 2014. By inviting scientists in materials and environment fields as well as their researches, the latest research advance in these subjects will be introduced, and their achievements will also be presented. With people's increasing concern to the environment, our efforts on the research of green materials will prove to be of great value.

To prepare for GMEE 2015, the experience with GMEE 2014 was followed with extra efforts paid on the reviewing process. For GMEE 2015, we have adopted a stricter reviewing process to make sure that all the papers accepted are of originality and practical value.

First, we have invited scientists in materials and environment fields from various universities and research centres to join GMEE 2015 as committee members/reviewers. Then when a submission was received, it would be assigned to 2 (or more if necessary) reviewers, which were decided by the committee chairs, for reviewing after being removed of the author information. Papers accepted by both reviewers would be accepted; those with conflicting opinions would be reviewed again by another reviewer. Suggestions from the reviewers would be given to the contributor to improve the paper quality. With this strict selecting process, we have completed the reviewing work.

GMEE 2015 has received 182 contributions before the submission deadline. After the reviewing, we have accepted 57 papers for publication. All papers accepted are included in four chapters, namely:

Chapter 1: Applied Material Science and Chemical Processing Engineering

Chapter 2: Environmental Engineering and Waste Recycling

Chapter 3: Architecture, Technologies and Materials in Construction

Chapter 4: Energy, Power and Sustainable Development

Finally, I would like to thank those people who have helped GMEE 2015 as well as GMEE 2014. Our contributors have kindly supported GMEE with their researches, and the Atlantis Press and their editors have made a lot of efforts on publishing the papers. The organizer, the Science and Engineering Research Center (SERC), Hong Kong, the reviewers and committee members, their work is also appreciated.

GMEE2015 Committee

Series: [Advances in Engineering Research](#)

Proceedings of the 2nd International Conference on Green Materials and Environmental Engineering

Nano Silica and Silica Fume for Durability Improvement and It's Impact on High Performance Concrete

Authors

A.M. Pattinaja, A.R. Indra Tjahjani, Jonbi

Corresponding author

A.M. Pattinaja

Keywords

Durability; silica fume; nano silica

Abstract

The latest trend of concrete technology declared that concrete is not only needs strength but also durability. It is concurrently with the environmental issues that material durability is something that needs to be prioritized in its use. Various attempts have been made to produce concrete that has high durability. Many studies and experiments have been done partly by using admixtures of fly ash, and silica fume (FS). The latest development was the application of nano silica (NS) to improve the performance of concrete especially its durability. In this study, further experiments were done by using admixtures of nano silica with and without silica fume. The additives were applied to the concrete mix design of high performance concrete (HPC) with $f'c$ 100 MPa as a reference, then mixed with NS in a percentage of 3%, 5%, 10%, 15% with and without silica fume. Further compressive strength, and durability testing were done with a standard DIN 1045, and RCPT standard ASTM C 1202. The experimental results shown that the optimum admixtures proportion were the application of NS 5% and SF 5%, which given the best of concrete compressive strength and durability. Furthermore, the

combination of the used of nano silica with silica fume is more effective than nano silica without silica fume.

[Download article \(PDF\)](#)

Part of series

[Advances in Engineering Research](#)

Publication date

December 2015

ISBN

978-94-6252-138-4

ISSN

2352-5401

DOI

[doi:10.2991/gmee-15.2015.31](https://doi.org/10.2991/gmee-15.2015.31)[How to use a DOI?](#)

Copyright

© The authors.

This article is distributed under the terms of the Creative Commons Attribution License 4.0, which permits non-commercial use, distribution and reproduction in any medium, provided the original work is properly cited. See for details: <https://creativecommons.org/licenses/by-nc/4.0/>

Nano Silica and Silica Fume for Durability Improvement and It's Impact on High Performance Concrete

A.M. Pattinaja, Jonbi and A.R. Indra Tjahjani

Civil Engineering, Faculty of Engineering, Pancasila University Jakarta, Indonesia

Abstract—The latest trend of concrete technology declared that concrete is not only needs strength but also durability. It is concurrently with the environmental issues that material durability is something that needs to be prioritized in its use. Various attempts have been made to produce concrete that has high durability. Many studies and experiments have been done partly by using admixtures of fly ash, and silica fume (FS). The latest development was the application of nano silica (NS) to improve the performance of concrete especially its durability. In this study, further experiments were done by using admixtures of nano silica with and without silica fume. The additives were applied to the concrete mix design of high performance concrete (HPC) with $f'c$ 100 MPa as a reference, then mixed with NS in a percentage of 3%, 5%, 10%, 15% with and without silica fume. Further compressive strength, and durability testing were done with a standard DIN 1045, and RCPT standard ASTM C 1202. The experimental results shown that the optimum admixtures proportion were the application of NS 5% and SF 5%, which given the best of concrete compressive strength and durability. Furthermore, the combination of the used of nano silica with silica fume is more effective than nano silica without silica fume.

Keywords-Durability; silica fume; nano silica

I. INTRODUCTION

This template, Durability is an important factor of concrete, which is the resistance of the material against external influences over the age of structure in the system of services. According to ACI 2008 concrete durability is defined as the ability to resist weathering, chemical attack, abrasion, or other damage [1]. Durable concrete will retain its original form, quality, and the ability of services though exposed to the environment [2]. However, due to interaction with the environment and the nature of the changes with respect to time, there is nothing inherently durable material.

Durability of concrete has decreased, due to mechanical or physical influences, such as chemical weathering by weather, abrasion, gas or polluting industries. As known, concrete is a building material that vulnerable to outside interference. Hence, it needs to be given special attention in the protection to bite. It is widely known that high performance concrete (HPC) with ratio of water and Binder ingredients between 0.3 and 0.4 is excellent in durability. Durability of concrete mostly depends on permeability and diffusion. Permeability is defined as property which regulates the rate of fluid flow to the porous material under pressure [3]. Concrete permeability can be

measured by determining the flow rate of water through the concrete specimens. It is important that the concrete ingredients that have been detained are protected against the intrusion of outside material, for example from dirty water containing acids due to pollution. The higher ratio of water against concrete shows more pores that are interconnected and increase the possibility of high concrete permeability. On the other hand, the application of Silica fume and Nano Silica will decrease the permeability in concrete due to the reduction of porosity, as well as connected pores. In the case of diffusion, this is defined as the rate of migration of ions or elements in concrete due to the difference in concentration. The diffusion coefficient measurements conducted by reason of chloride shown that diffusion in concrete produced corrosion.

Some researchers [4,5] investigated the durability of concrete in relation with carbonation reactions, such as aggregate alkali, to the corrosion of reinforcement, and resistance to sulphate. Meanwhile conducted a study on permeability based on microstructure observations of concrete, which said that concrete with Nano Silica had a good impermeability, and produced more solid concrete [6].

The used of heavy cement Nano Silica 3.8%, could elevate the compressibility, tensile strength, and the durability of the concrete [7]. These were due to the onset of more homogeneous microstructures, more solid and gel size C-S-H. The average value of Coulomb Test RCPT to concrete mix ingredients and supplements such as Silica fume, fly ash, and slag were low to very low [8]. The durability and mechanical properties of HPC depends on improvement of cement paste [9]. Further quality improvement in cement paste and aggregate interface were obtained through the use of admixtures. Thus, this research is a further experiment of the usage of Nano Silica and Silica Fume for durability improvement, and to investigate its impact on high performance concrete.

II. MATERIALS AND METHODOLOGY

The manufacturing of the specimens for this research was based on the reference concrete mix proportion of 100 MPa (100 $f'c$ R) composition: cement type I = 800 kg/m³, Silica Fume ex Sika = 120 kg /m³, water/binder: 0.23, fine aggregate = 637kg/m³, coarse aggregate = 1091 kg / m³, super plasticizer Viscocrete 10 = 5.21 liters. Size of Nano Silica ex Bratachem 20-40 nm.

Table 1. Shows the nomenclature on the specimen based on composition of mixture proportion.

TABLE I. NOMENCLATURE OF SPECIMENS

No	Specimen	Nano silica NS (%)				Silica fume (%)
		3	5	10	15	
1	f'_c 100 R	-	-	-	-	-
2	f'_c 100 NS3	√	-	-	-	-
3	f'_c 100 NS5	-	√	-	-	-
4	f'_c 100 NS10	-	-	√	-	-
5	f'_c 100 NS15	-	-	-	√	-
6	f'_c 100 NS3 SF5	√	-	-	-	√
7	f'_c 100 NS5 SF5	-	√	-	-	√
8	f'_c 100 NS10 SF5	-	-	√	-	√
9	f'_c 100 NS15 SF5	-	-	-	√	√

Testing the permeability was conducted according to the concrete standard DIN 1045. Specimens in the form of concrete block size 200 mm x 120 mm x 200 mm, and aged of 28 days were used. The pressure to each specimen was 0.5 N/mm² for 3 times 24 hours. Rapid Chloride Penetration Test (RCPT) was carried out according to the standard ASTM C 1202 at the cylindrical specimens 50 mm x 100 mm.

III. RESULT AND DISCUSSION

A. Impact on Compressive Strength

Figure 1. Shows the impact of NS on different percentages against the compressive strength. The use of NS 5% without SF provide increased compressive strength of 43.8% (126.1 MPa), while the addition of NS 5% with SF 5% increase in the compressive strength of 57% (137.3 MPa). The results of combining the usage of NS and SF are more effective because the merger of filler and pozzolanic reactivity [10,11].

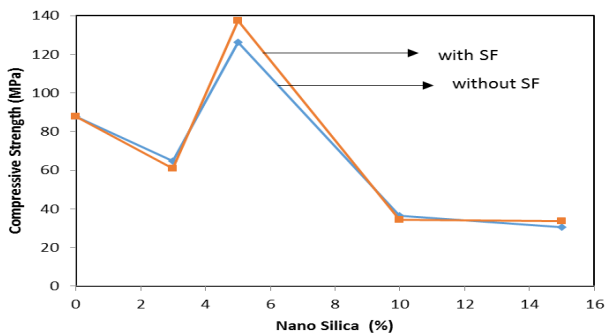


FIGURE I. COMPRESSIVE STRENGTH OF HPC CONTAINING NS WITH AND WITHOUT SF

B. Impact on permeability

Table 2 exposes the permeability test results, which shown that the composition of NS 5% and SF 5% produces a better waterproof.

TABLE II. PERMEABILITY TEST RESULTS OF f'_c 100 WITH NS AND SF.

No	Type	Permeability test with DIN 1045 standard	
		28 day (cm)	Result
1	f'_c 100 R	1.0	waterproof
2	f'_c 100 NS3	2.3	waterproof
3	f'_c 100 NS5	1.2	waterproof
4	f'_c 100 NS10	3.2	waterproof
5	f'_c 100 NS15	3.2	waterproof
6	f'_c 100 NS3 SF5	2.8	waterproof
7	f'_c 100 NS5 SF5	1.1	waterproof
8	f'_c 100 NS10 SF5	3.2	waterproof
9	f'_c 100 NS15 SF5	3.5	waterproof

The impact of using NS alone as admixture against concrete permeability is shown in Figure 2. The use NS 3% increase in permeability to 2.3 cm (130%), NS 5% increase in value to 1.2 cm (20%), NS 10% increased to 3.2 cm (220%) and NS 15% increase in permeability to 3.3 cm (230%). This shows that the use NS not affect the permeability of concrete and even tended to increased permeability values, however, the resulting concrete are still providing watertight concrete because it limits the penetration to less than 5 cm.

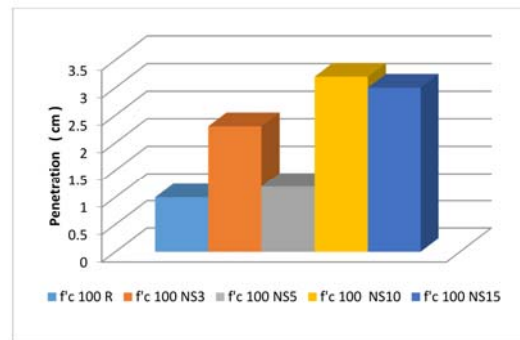


FIGURE II. THE USAGE OF NS WITH WATER PENETRATION

The used of NS in conjunction with SF, as shown in Figure 3, increase in the permeability value to 180%, 220%, and 250%. However, f'_c 100 NS 5% SF 5% gave an increase of 10% against reference. These results indicate that the used of NS 5% and SF 5% is the optimum mixture. The cement paste was added with nano silica, it increased the chain length of CSH gel and significantly improves the CSH. That an increase CSH would increase the leaching resilience of calcium, and increase the durability [12].

The improvement of concrete compressive strength and a decrease in permeability occurred because NS and SF will be dispersed and reacted with crystalline Ca(OH)₂ as pozzolanic material. It creates a matrix of cement, which is more homogenous and compact, and reducing the capillary pores. Hence, making the concrete more impermeable and increased compressive strength [13,14].

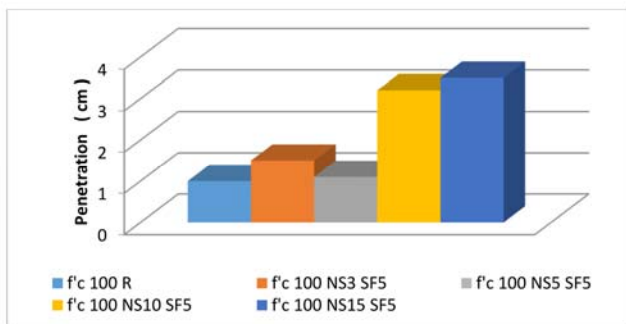


FIGURE III. THE USAGE OF NS AND SF AGAINST WATER PENETRATION

C. Impact on Reinforcement Corrosion

The impact on reinforcement corrosion by Rapid Chloride Penetration Test is presented in Table 3. The usages of NS alone and with SF were measured through the charge that passed each specimen. With the charge that passed the high performance concrete (f'_c 100 R) at 28 days is considered as Very Low (107,1 Coulomb), the other specimens are considered as Low, moderate and very low. It is found that the admixtures of NS 5% and SF 5% had passed charge of 339 Coulomb, which is considered as Very low

TABLE III. TEST RESULTS OF RCPT FOR f'_c 100 R WITH NS AND SF.

No	Type	RCPT Test standard ASTM C 1202	
		28day (Coulombs)	Result
1	f'c 100 R	107,1	Very low
2	f'c 100 NS3	2661	Moderate
3	f'c 100 NS5	351	Very low
4	f'c 100 NS10	1602	Low
5	f'c 100 NS15	1512	Low
6	f'c 100 NS3 SF5	264	Very Low
7	f'c 100 NS5 SF5	339	Very Low
8	f'c 100 NS10 SF5	1608	Low
9	f'c 100 NS15 SF5	1377	Low

IV. CONCLUSION

In this research experiment the durability improvement of high performance concrete was conducted by improving its permeability and the resistance of concrete reinforcement against corrosion. It was found that:

- The optimum proportion of admixtures of NS 5 % and SF 5% has given the best compressive strength and concrete durability;
- The combination admixtures of NS with SF are more effective than NS without SF; and
- Percentage nano silica usage that exceeds 10%, lowering the mechanical properties and durability of concrete

REFERENCES

[1] ACI Committee 211. ACI 211.4R-08 R, "Guide for Selecting for High-Strength Concrete Using Portland Cement and Other Cementitious

Materials", 2008.

[2] Mehta, P.K. and Monteiro, P.J.M. Concrete Microstructures, Properties, and Materials. McGraw-Hill, 2006.

[3] Li, Z. Advanced Concrete Technology, John Wiley, Hoboken, New Jersey. 2011.

[4] Ulm, F.J.; Coussy, O.; Li, K.F.; and Lavire, C., "Thermo-Chemo-Mechanical of ASR Expansion in Concrete Structure", ASCE Journal of Engineering Mechanics, 126(3), pp. 233-242, 2000.

[5] Kuhl, D.; Bangert, F.; and Meschke, G. "Coupled Chemo-Mechanical Deterioration of Cementitious Materials, Part I : modeling : and Part II: Numerical Method and Simulations", International Journal of solid and Structures, 101(1), pp.15-67, 2004.

[6] Ji, T. "Preliminary Study on the Waterpermeability and Microstructure of Concrete Incorporating Nano-SiO₂", Cem and Con.Res., 35, pp. 1943-1947, 2005.

[7] Quercia G., Husken G., Brouwers H.J.H. "Water Demand of Amorphous Nano silica and Its Impact on the workability of Cement Paste, Cement and Concrete Research., 2012.

[8] Issa, Mohsen A.; Khalil, Atef A.; Islam, Shahidul.; and Krauss, P.D., "Mechanical Properties and Durability of High Performance Concrete for Bridge Deck", PCI Journal, 2008.

[9] Qing, Y.; Zhang, Z.; and Kong, D. "Influence of Nano-SiO₂ Addition on Properties of Hardened Cement Paste as Compared with Silica Fume, Construction and Building Materials 21, pp. 539-545, 2007.

[10] Ghasemi, A.M.R., Parhizkar, T., dan Ramezani-pour, A.A., "Influence of Colloidal Nano-SiO₂ Addition as Silica Fume Replacement Material in Properties of Concrete" Second International Conference on Sustainable Construction Materials and Technologies, Universita Politenica delle Marche, Ancona, Italy, 2010.

[11] Jonbi; Pane, I.; Hariandja, B.; Imran, I. The Use of Nanosilica for Improving of Concrete Compressive Strength and Durability. Applied Mechanics and Materials (AMM) Vols. 204- 208 pp. 4059-4062, 2012.

[12] Gaitero, J.J., Campillo, I. and Guerrero. "Reduction of the Calcium Leaching Rate of Cement Paste by Addition of Silica Nanoparticles, pp.1112-1118, 2008.

[13] Chen, R.S and Ye, Q. "Research on Comparison of Properties of Hardened Cement Paste Between Nano SiO₂ and Silica Fume Add". Concrete Research 1, pp 7-10, 2002.

[14] Khanzadi, M.; Tadayon, M.; Sepehri, H.; and Sepehri, M. "Influence of nano-silica particles on Mechanical properties and permeability of concrete ". Second International Conference on Sustainable Construction Materials and Technologies, Universita Politenica delle Marche, Ancona, Italy, 2010.